


Endian Hotspot 500

Accesso Internet rapido e sicuro

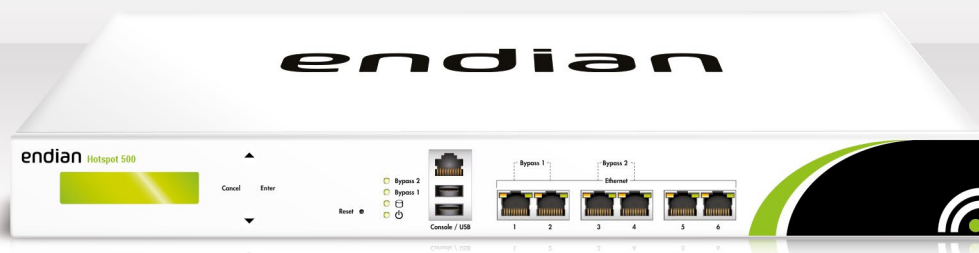

Perfetto per le aziende di medie dimensioni con la necessità di separare la rete corporate da quella guest e per le strutture ricettive che gestiscono ogni giorno centinaia di ticket per la connessione al web. Fino a 500 utenti potranno connettersi in contemporanea e navigare in Internet attraverso Endian Hotspot 500, che garantisce le migliori prestazioni tra i prodotti della sua classe. Semplice da installare e ricco di funzionalità che rendono l'esperienza dell'utente semplice e sicura.

Traccia e rendi sicura la navigazione dei tuoi ospiti

Verifica che i siti visitati dai tuoi clienti non siano inappropriati o illegali. Blocca siti porno o inneggianti alla violenza e al razzismo. Imposta in maniera semplice il filtro web che categorizza più di 140.000.000 di pagine. Rendi la navigazione sicura da virus e altro malware attraverso il potente anti-virus.

Integrazione con gestionali di terze parti

Se hai già un programma gestionale per la fatturazione, puoi integrarlo con Endian Hotspot. In questo modo gestirai da una unica interfaccia, con grande semplicità, tutti gli accessi ad Internet e gli altri servizi della tua struttura.

Piattaforma marketing integrata

L'Hotspot di Endian non è solo un servizio per i tuoi clienti, ma uno strumento per promuovere la tua attività. Il portale di accesso a Internet è totalmente personalizzabile: metti in evidenza le offerte speciali e le promozioni in corso. Mostra ai tuoi visitatori tutta la qualità dei tuoi servizi.

Perfetto per catene di negozi, uffici e aziende con più stabilimenti

Le appliance Endian Hotspot sono perfette in configurazione master-satellite: Hotspot 500 o Hotspot 1500 possono essere installate nella sede centrale, da cui si configura e gestisce il servizio, mentre Hotspot 150 è ideale come satellite per consentire il collegamento Internet nelle sedi distaccate.

Endian Hotspot 500	
Utenti concorrenti	fino a 500
Throughput	500 Mbit/s
Ideale per	Grandi hotel, camping, aziende di media dimensione, istituti scolastici, musei, cliniche



Connessione WiFi
sicura



Piattaforma
marketing



Social Login

Endian Hotspot Features

Hotspot

User Management
<ul style="list-style-type: none"> Authentication through <ul style="list-style-type: none"> Local or external RADIUS LDAP / Active Directory Google / Facebook MAC-address accounts User accounts import/export User password recovery Social Login (Facebook / Google) User auto-creation through e-mail or SMS (SmartConnect) Bandwidth limitation per user Configurable multiple logins per user
Configuration and Integration
<ul style="list-style-type: none"> Multi-location setup through master/slave configuration Configurable captive portal Customizable templates WYSIWYG editor with multimedia file upload Multi-language support Configurable access to allowed sites (walled garden) Configurable mandatory Terms of Service confirmation Bandwidth limiting based on user, ticket or global settings JSON API for external accounting and third party integration Integration with property management systems ASA HOTEL, pcs phoenix
Accounting and Ticketing
<ul style="list-style-type: none"> Integrated RADIUS service Integrated accounting based on tickets Payment service through credit card and PayPal Freely configurable ticket rates Pre-/postpaid and free tickets Time-/traffic-based tickets Cyclic/recurring tickets (daily, weekly, monthly, yearly) Single-click ticket generation (Quick ticket) Configurable ticket and account validity MAC address tracking for free hotspots Remember user after first authentication (SmartLogin)

Networking

Uplink Management
<ul style="list-style-type: none"> Multiple WAN uplink support Multiple public IP addresses Automatic WAN uplink failover Monitoring of WAN uplinks Uplink types: Ethernet (static/DHCP), PPPoE, PPTP Support for 3G / 4G USB dongles
Networking Features
<ul style="list-style-type: none"> Separated network zones Quality of service and bandwidth management VLAN support Stealth mode OSI layer 2 firewall functionality Spanning tree Automatic client network configuration (DHCP / static IPs) Wired and wireless connections in the hotspot are supported NTP (Network Time Protocol) DHCP server Dynamic DNS
Network Address Translation (NAT)
<ul style="list-style-type: none"> Destination NAT Incoming routed traffic One-to-one NAT Source NAT (SNAT)
Routing
<ul style="list-style-type: none"> Static routing Source-based routing Destination-based routing Policy-based routing

Security

Threat Protection
<ul style="list-style-type: none"> Stateful packet firewall Application control SYN/ICMP flood protection DNS proxy/routing Anti-spyware Phishing protection Transparent HTTP/HTTPS web filtering Cyren URL filter with 140 million categorized URLs SafeSearch enforcement Time based access control with multiple time intervals Anti-virus
VPN
<ul style="list-style-type: none"> OpenVPN Native VPN client app for Microsoft Windows and Apple OS X Support for mobile devices (Android, iOS) Support for VPN over HTTP Proxy VPN client-to-site (roadwarrior) VPN failover VPN user and group management
Encryption
<ul style="list-style-type: none"> SSL-encrypted captive portal SSL-encrypted administration interface SSL-encrypted VPN connections between master and satellite systems Encrypted backups via email

Management Interface

Logging and Reporting
<ul style="list-style-type: none"> Reporting dashboard Detailed system, web and virus reports Hotspot connection logging Live network traffic monitoring (powered by ntopng) Live log viewer Detailed web access report Network/system/performance statistics Rule-based logging settings (firewall rules) Syslog: local or remote OpenTSA trusted timestamping Email Notifications SMS Notifications
Administration
<ul style="list-style-type: none"> Centralized management through Endian Network Easy web-based administration Multi-language web-interface Secure remote SSH/SCP access Serial console Centralized updates through Endian Network Scheduled automatic backups Instant recovery / Backup to USB stick (Endian Recovery Key) Different user roles for administrator, hotspot administrator and hotspot account editor

Endian Hotspot 500 Specifications

Hardware	Hotspot 500
Case	Rack 1U
Dimensions	44mm x 430mm x 260mm
Weight	5 kg
Memory	4 GB
Storage	2x 320 GB HDD Raid
Networking	6x Gigabit Ethernet
LAN Bypass	2 Pairs
Power Supply	65W Internal
Cooling	Fans
LCD Display	Yes
Hardware Warranty	included in maintenance
Certifications	FCC/CE/RoHS

© 2016 Endian Spa. Soggetto a modifica senza preavviso. Endian e Endian UTM sono marchi di Endian Spa. Tutti gli altri marchi e marchi registrati sono di proprietà dei loro rispettivi proprietari.